



MASTER TL-D Reflex

MASTER TL-D Reflex 36W/840 1SL

The MASTER TL-D Reflex lamp directs most of the light to where you need it, thanks to an internal reflector. This results in having the same lighting level while using only half the number of lamps in the luminaire. It is therefore extremely suitable for use in luminaires with only a simple reflector or without any.

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Cap-Base Information	-
Bulb	T8 [26 mm]
Bulb Finish	Reflector
Life to 50% failures EM	15000 hr
Life to 50% fail Preheat EL,3h	20000 hr
Life to 50% fail Nonpreh EL,3h	12000 hr
Life to 10% fail Nonpreh EL,3h	10000 hr
Life to 10% fail Preheat EL,3h	17000 hr
Life to 10% failures EM	12000 hr
LSF EM 20000h Rated,3h cycle	2 %
LSF EM 16000h Rated,3h cycle	33 %
LSF EM 12000h Rated,3h cycle	89 %
LSF EM 8000h Rated, 3h cycle	99 %
LSF EM 6000h Rated, 3h cycle	99 %
LSF EM 4000h Rated, 3h cycle	99 %
LSF EM 2000h Rated, 3h cycle	99 %

• Light Technical Characteristics

Beam Description	FA160 [160° Window]
Color Code	840 [CCT of 4000K]

Color Rendering Index	85 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Chromaticity Coordinate X	377 -
Chromaticity Coordinate Y	372 -
Luminance Average EM	2.19 cd/cm ²
Lum Efficacy Rated EM 25°C	93.1 Lm/W
LLMF EM 20000h Rated	90 %
LLMF EM 16000h Rated	91 %
LLMF EM 12000h Rated	92 %
LLMF EM 8000h Rated	93 %
LLMF EM 6000h Rated	94 %
LLMF EM 4000h Rated	95 %
LLMF EM 2000h Rated	96 %
Luminous Flux EM 25°C, Rated	3350 Lm
Luminous Flux EM 25°C, Nominal	3350 Lm
Design Temperature	25 C

• Electrical Characteristics

Lamp Wattage	36 W
Dimmable	Yes



asimpleswitch.com

PHILIPS

sense and simplicity

MASTER TL-D Reflex

Lamp Current EM 25°C	0.440 A
Lamp Wattage EM 25°C, Rated	36.0 W
Lamp Wattage EM 25°C, Nominal	36.0 W
Lamp Voltage EM 25°C	103 V

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	5.0 mg

• Product Dimensions



Base Face to Base Face A	1199.4 (max) mm
Insertion Length B	1204.1 (min), 1206.5 (max) mm

Overall Length C	1213.6 (max) mm
Diameter D	28 (max) mm

• Product Data

Order code	928048408479
Full product code	928048408479
Full product name	MASTER TL-D Reflex 36W/840 1SL
Order product name	MASTER TL-D Reflex 36W/840 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500559531
Bar code on outerbox - EAN3	8711500559548
Logistic code(s) - 12NC	928048408479
ILCOS code	FDR-36/40/1B-E-G13
Net weight per piece	151.000 gr

Dimensional drawing


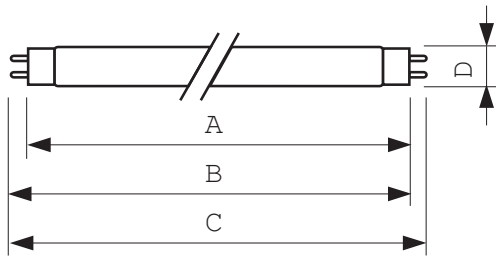


G13

G13, T8

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D Reflex 36W/840	1199.4	1204.1	1206.5	1213.6	28

Photometric data

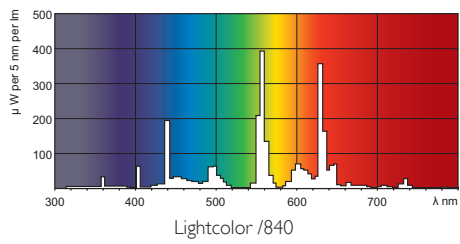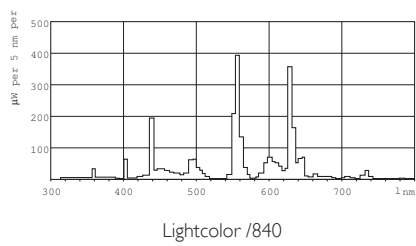

© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, July 27
data subject to change