



MASTER LEDtube GA

MASTER LEDtube GA100 1200mm 19W/840 C

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. This product is the ideal solution for up lighting in general lighting applications.

Product data

• General Characteristics

Cap-Base	G13
Life to 70% lumen maintenance	40000 hr
Average Life At Ambient 25°C	40000 hr

• Light Technical Characteristics

Color Code	840
Beam Angle	120 D
Correlated Color Temperature	4000 K
Luminous Flux	1650 Lm
Color rendering index	85

• Electrical Characteristics

Wattage	19 W
Voltage	100-240 V
Power Factor	0.9 (min) -
Lamp voltage	100-240 V

• Temperature Characteristics

T-case maximum	55 (max) C
Operating temperature	-30 (min), 45 (max) C
T-Storage	-40 (min), 65 (max) C

• Product Dimensions

Length A1	1198.0 mm
Length A3	1212.0 mm

Fixing Hole Distance	1205.0 mm
A2 Length	
Mounting hole diameter	28.0 mm
Circular outline dimension	25.68 mm

• Approval & Application Chars

VDE marking	Yes
CE marking	Yes
UL certificate	No
RoHS compliance	Yes
KEMA Keur certificate	Yes

• Product Data


Order code	929000292002
Full product code	929000292002
Full product name	MASTER LEDtube GA100 1200mm 19W/840 C
Order product name	MST LEDtube GA100 1200mm 19W/840 C
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8718291200703
Bar code on outerbox - EAN3	8718291200710
Logistic code(s) - 12NC	929000292002
Net weight per piece	0.360 kg



PHILIPS


sense and simplicity

Dimensional drawing

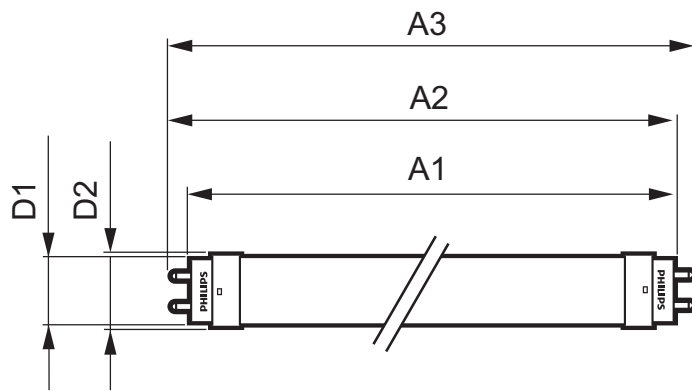

MASTER LEDtube GA

Product	A1 (Norm)	A2 (Norm)	A3 (Norm)	D1 (Norm)	D2 (Norm)
LEDtube GA100 1200mm 19W 840 G13	1198.0	1205.0	1212.0	28.0	25.68



G13



© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, August 4
data subject to change