



# MASTER TL5 High Output Eco

MASTER TL5 HO Eco 73=80W/830 1SL

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HO Eco lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

## Product data

### • General Characteristics

Cap-Base	G5
Bulb	T5 [16 mm]
Life to 50% fail	25000 hr
Preheat EL,3h	
Life to 10% fail	21000 hr
Preheat EL,3h	
LSF HF Preheat	94 %
20000h Rated,3h	
LSF HF Preheat	99 %
16000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
2000h Rated,3h	

### • Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	85 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -
Luminous Flux Lamp EL 35°C	7000 Lm

Lum Efficacy Rated HF 25°C	90 Lm/W
Lum Efficacy Rated HF 35°C	96 Lm/W
LLMF HF 20000h Rated	90 %
LLMF HF 16000h Rated	91 %
LLMF HF 12000h Rated	92 %
LLMF HF 8000h Rated	93 %
LLMF HF 6000h Rated	94 %
LLMF HF 4000h Rated	95 %
LLMF HF 2000h Rated	96 %
Luminous Flux EL 25°C, Rated	6550 Lm
Luminous Flux EL 25°C, Nominal	6550 Lm
Design Temperature	35 C

### • Electrical Characteristics

Lamp Wattage	73 W
Lamp Voltage EL 25°C	133 V
Lamp Current EL 25°C	0.555 A
Dimmable	Yes
Lamp Wattage EL 35°C	73.1 W
Lamp Current EL 35°C	0.555 A



asimpleswitch.com

# PHILIPS

sense and simplicity

# MASTER TL5 High Output Eco

Lamp Voltage EL 35°C	133 V
Lamp Wattage EL 25°C, Rated	73.0 W
Lamp Wattage EL 25°C, Nominal	73 W

### • Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg

### • Measuring Conditions

Calibration Current	0.550 A
HF Generator Rated Voltage	278 V
Resistor	260 ohm

### • Product Dimensions

Base Face to Base Face A	1449.0 (max) mm
-----------------------------	-----------------

Insertion Length B	1453.7 (min), 1456.1 (max) mm
Overall Length C	1463.2 (max) mm
Diameter D	17 (max) mm

### • Product Data



Order code	927991883032
Full product code	927991883032
Full product name	MASTER TL5 HO Eco 73=80W/830 1SL
Order product name	MASTER TL5 HO Eco 73=80W/830 1SL/20
Pieces per pack	1
Packing configuration	20
Packs per outerbox	20
Bar code on pack - EAN1	8727900908442
Bar code on outerbox - EAN3	8727900908459
Logistic code(s) - 12NC	927991883032
ILCOS code	FDH-73/30/1B-L/P-G5-16/1450
Net weight per piece	128.700 gr

## Warnings and Safety

- Energy reduction is only achieved with current-controlled gear
- The lamps operate perfectly with power-controlled gear, but in that case give more light output instead of using less energy

- Depending on the technical design of the ballast the increase of light output can be up to 10 % with a fully power-controlled ballast

## Dimensional drawing


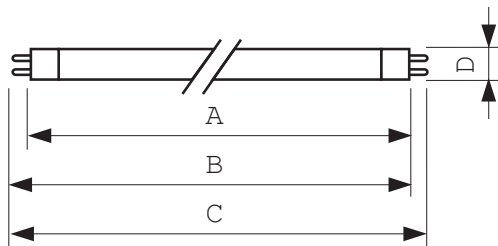


G5

## G5, T5

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO Eco 73=80W/830	1449.0	1453.7	1456.1	1463.2	17

## Photometric data

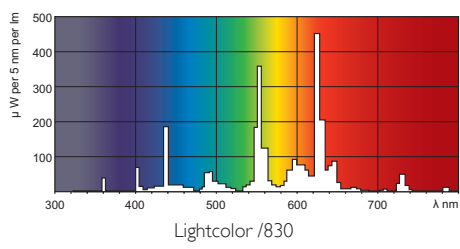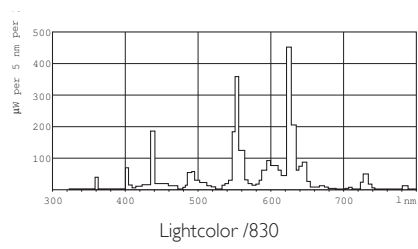

© 2012 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2012, August 4  
data subject to change