

## POWERSTAR HQI-TS EXCELLENCE

---

Metal halide lamps for enclosed luminaires



- Shop interiors, shop windows
- Shopping arcades
- Foyers, reception areas
- Buildings, monuments, bridges
- Museums, exhibitions
- Exhibition halls and trade fairs
- Pedestrian zones, public squares
- Parks and gardens

### Product benefits

---


- High efficiency
- Uniform distribution of light
- Good to excellent color rendering
- Long life time
- Hot restrike capable

### Benefits of OSRAM UV filter technology

---

- Reduced material load within the luminaire
- Far exceeds the requirements of IEC 61167



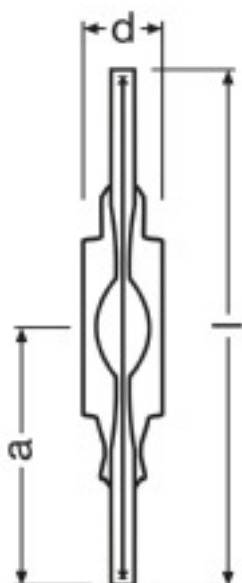

---

*Product line drawing with letters*  
70 W/WDL RX7S | 70 W/NDL RX7S | 70 W/D RX7S | 70 W/CD  
RX7S | 150 W/WDL RX7S-24 | 150 W/NDL RX7S-24 | 150  
W/D RX7S-24 | 150 W/CD RX7S-24

## Technical data

Product description	Nominal wattage	Base (standard designation)	Diameter	Length	Light center length (LCL)
70 W/WDL RX7S	70 W	RX7s	19.0 mm	117.0 mm	
70 W/NDL RX7S	70 W	RX7s	19.0 mm	117.0 mm	
70 W/D RX7S	70 W	RX7s	19.0 mm	117.0 mm	
70 W/CD RX7S	70 W	RX7s	19.0 mm	117.0 mm	57.0 mm
150 W/WDL RX7S-24	150 W	RX7s	23.0 mm	135.0 mm	66.0 mm
150 W/NDL RX7S-24	150 W	RX7s	23.0 mm	135.0 mm	66.0 mm
150 W/D RX7S-24	150 W	RX7s	23.0 mm	135.0 mm	66.0 mm
150 W/CD RX7S-24	150 W	RX7s	23.0 mm	135.0 mm	66.0 mm

## System guarantee

---

For the vast majority of our lamps we are offering an extended system guarantee in conjunction with OSRAM POWERTRONIC control gear.

## Application advice

---

For more detailed application information and graphics please see product datasheet.

## References / Links

---

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee)

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.